


P/N 6601-10 / 6601-15 / 6601-30 / 6601-50 / 6601-80

The LifeRamp is a great system for that immediate, urgent need. Compact, it is design to fit in multiple configurations of emergency responder vehicles, or for those on the water, on their boats. Easy to carry, the multiple handles on the LifeRamp permit easy carrying to shore by a single person for the shorter systems, and two people for the longer ones. User-repacked, no requirements to return to OEM or repair center for repacking.

Color	Black Tube Structure, Yellow Floor and patches
Chambers	Two / Dual (2)
Shared Dimensions	45.5" Width, 8.6" Height
High Pressure Inflation System	Rear end, single connect, inflates both chambers simultaneously
Inflation time (cylinder)	±1 minute
Inflation time (Air inflation)	1-5 minutes
Optimal Air Pressure	2.6 P.S.I.
Cleaning	Mild detergent, water and sponge dry. Lubricate hose fittings, D-Ring and system quick release (DC-55 grease). Tool needed: ¼" Allen wrench.
Material	The chambers are constructed with black neoprene coated material. The floor (yellow) is constructed of coated Hypalon™ and has reinforcements (fiberglass baton).
Replaceable Component	Pivot Line, Valise, 6341 pressure relief valve; 63408 Universal top up valve, 6617-001 Non-Tapered Battens,
Accessories	5513-LR Repair Kit; 6457 Quick Connect ¼" fitting; 6601-003 inflation hose assembly, 6314 Top-up valve adapter, 6366 Socket Tool
User Manual	6623
Markings	All located on floor: Silkscreen: "LifeRamp"; "Tulmar – Hawkesbury, Ontario, Canada"; & Stencil: "S/N: 6001-XX-YY-ZZZZ" / Valise: "LifeRamp" plus size in feet (length).



6601-10

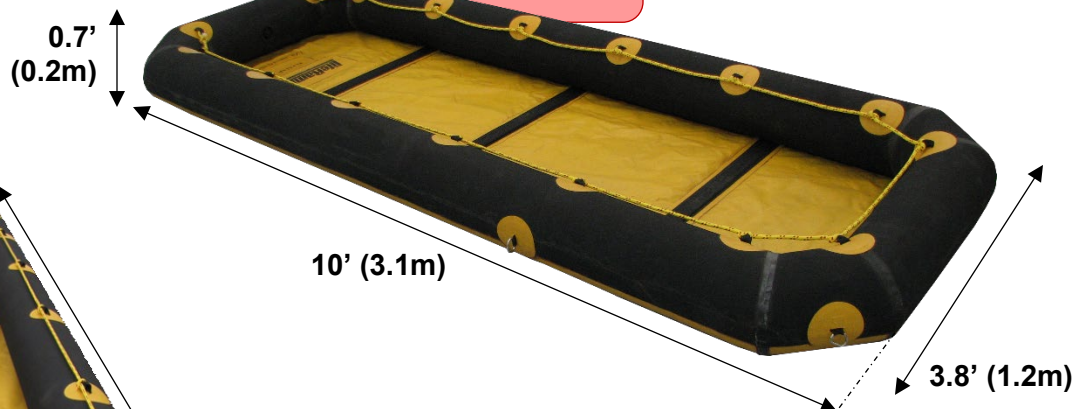

6601-15



**Water
Rescue**



**Ice Water
Rescue**



**Mud & Unstable
Terrain Rescue**



Technical Specifications Table

	6601-10	6601-15	6601-30	6601-50	6601-80
Weight	28 lbs (12.7kg)	42 lbs (19.1kg)	78 lbs (35.4kg)	90 lbs (40.9kg)	190 lbs (86.2kg)
Length	10' (3.1m)	15' (4.5m)	30' (9.2m)	50' (15.3m)	80' (24.4m)
Load Limits Lbs	1100 lbs	1679 lbs	3400 lbs	5700 lbs	9150 lbs
Load Limits* Kg	499 kg	762 kg	1543 kg	2586 kg	4151 kg
Cylinder Carrier	Included	Included	Not Available	Not Available	Not Available
Water Pocket	Not Available	Not Available	Included	Included	Included
Valise P/N	6602	6603	6604	6605	6606
Pivot Line P/N	6601-004	6601-005	6601-006	6601-007	6601-008

*Load Limits references how much weight the LifeRamp can hold while on the water and keep at least 6" (15.25cm) of tubing above water, assuming the system is inflated with optimal air pressure.